



SOLO Wall Sconce – WHITE or RGB LED light

During the day, the LT SOLO wall sconce is a decorative fixture.

At night, it is illuminated with 600 LED lights.

There are several ways to enjoy the fixture and create the desired ambiance:

For the LT SOLO with white LEDs, the remote control operates simultaneously the frame and the center panel in Olycale stone.

It can be set to automatically change the intensity of the lit frame by simply using the remote control.

For the LT SOLO with white LEDs and color LEDs, a wall switch needs to be installed to operate the white LED's behind the center panel in Olycale stone.

The remote control provided only turns on and controls the RGB color cycle on the frame.

The remote changes the intensity of the light from 0 to 100%, there is a lighting program where the light increases on the frame then decreases and increases again, the speed of the cycle is also adjustable.

Models available:



Unis Scandola Sculptural Edo Oriental Atlantis Hawaii

Weight : 10.5 kg-23 lbs in white or 10.9 kg-24 lbs in color.

Atlantis model is double weight in both white & color version.

Height : 41" / 104 cm

Width : 16-1/2" / 42 cm

Frame : Black or white color

For the same output, the LT SOLO saves 75% energy compared to a standard lighting fixture.

Cinier products are all made in France.

| | | |
|---------------------|-------------|-----------------------------|
| Project Information | | |
| Job Name: _____ | Date: _____ | Type of Finish/Shade: _____ |
| Comments: _____ | | |
| Approved: _____ | | |



SOLO Wall Sconce – WHITE or RGB LED light

Power supply 120V. UL Listed transformer included, rated for interior use IP20. Remote control included.

Energy cons.: 70 W with white LED, 100 W with white + RGB colors LED.

Clear LEDs (Warm 3000K* or neutral 4000K)

- White, subtle and minimalist (warm or neutral white)


Lighting output: 5400 Lumens

- White + RGB color LEDs, versatile with colors

Lighting output: 0 to 3700 Lumens

Models available:

| Model | Frame Color | LED Color | Size | Watts (consumption) | Lumens (output) |
|---------------------|-------------|---------------|-------------|---------------------|-----------------|
| UNO-W-3000k-120V-BF | Black | Warm white | 41 X 16-1/2 | 70 | 0-4.8K |
| UNO-W-3000k-120V-WF | White | Warm white | 41 X 16-1/2 | 70 | 0-4.8K |
| UNO-W-4000k-120V-BF | Black | Neutral white | 41 X 16-1/2 | 70 | 0-4.8K |
| UNO-W-4000k-120V-WF | White | Neutral white | 41 X 16-1/2 | 70 | 0-4.8K |
| UNO-RGB-1220V-BF | Black | White + RGB | 41 X 16-1/2 | 100 | 0-3.7K |
| UNO-RGB-1220V-WF | White | White + RGB | 41 X 16-1/2 | 100 | 0-3.7K |

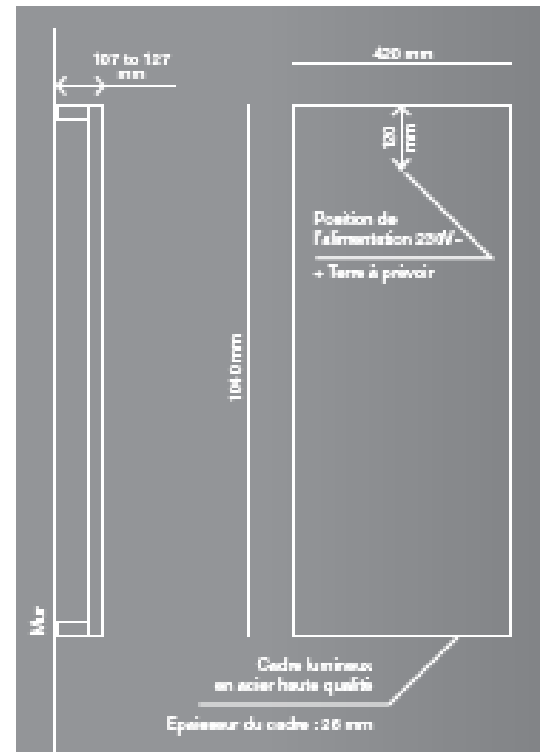

Remote control included.



UL Listed transformer included.



UL Recognized Component Mark

These are Marks consumers rarely see because they are specifically used on component parts that are part of a larger product or system.

These components may have restrictions on their performance or may be incomplete in construction.

The component recognition marking is found on a wide range of products, including some switches, power supplies, printed wiring boards and thousands of other products.

Just as with the UL Listing and Classified Marks, there are three variations of UL's Recognized Component Mark: one for the United States and one for both the United States and Canada.

The C-UR Mark is applied to components only used in the Canadian market. Components with this type of Mark have been evaluated to Canadian standards. The optional C-UL-US Component Recognition Mark indicates compliance with both Canadian and U.S. requirements.

Choosing the LT SOLO reduce the energy consumption of your home.

CINIER LT SOLO LED products combine a high quality LED to a unique lighting design.

Project Information

Job Name: _____ Date: _____ Type of Finish/Shade: _____

Comments: _____

Approved: _____